

OEM PRESSURE CONTROLLER DATASHEET



Module Basic

Type 1 : 0/200 mbar

Type 2 : 0/2000 mbar

Type 3 : 0/8000 mbar



Module Dual

Type 4 : -900/1000 mbar

Type 5 : -900/6000 mbar

Elveflow OEM range one channel pressure regulator module, with one sensor connection.

Table of content

General specifications.....	3
Pneumatic specifications (same as OB1 MK4).....	4
Electrical Specifications.....	5
Communication specifications.....	5
Control and monitoring.....	5
Dimensional drawing.....	6
Connections.....	6
Assembly recommandations.....	8

General specifications

Dimensions (mm)	124 x 99 x 70 mm
Weight (g)	Type 1 / 2/ 3 : 750 g Type 4 / 5 : 1000 g
Control Center connection	M12 8 pins (shielded cable 25 cm recommended)
Sensor communication	I2C, analog
Sensor connection	M8 4 pins (shielded cable 1 m recommended), or Terminal block (4 wires)
Sensor compatibility	Elveflow sensors (MFS, MPS, bubble detector and MFP), Analog sensors with 0/10 V input signal and with up to 24 V supply
Number of sensor connections	1
Casing material	Aluminium
Mounting orientation	Any

Pneumatic specifications (same as OB1 MK4)

Channel pressure range	0 to 200 mbar (0 to 2.9 spi)	0 to 2000 mbar (0 to 29 psi)	0 to 8000 mbar (0 to 116 psi)	-900 to 1000 mbar (-13 to 14.5 psi)	-900 to 6000 mbar (-13 to 87 psi)
Pressure stability	0.015 % FS	0.005% FS	0.006 % FS	-900 to 500 mbar : 0.005 % FS 500 to 1000 mbar : 0.007% FS	-900 to 2000 mbar : 0.005 % FS 2000 to 6000 mbar : 0.007% FS
Response time	Down to 10 ms				
Settling time	Down to 50 ms				
Minimum pressure increment	0.006 % FS	0.006 % FS	0.006 % FS	0.0064 % FS	0.0061 % FS
Input pneumatic connector	6 mm push-in				
Output pneumatic connector	4 mm push-in				
Pressure supply	1.5 bar (or Max pressure + 0.5 bar) to 10 bar Non corrosive, non explosive, dry and oil-free gases, e.g. air, argon, N2, CO2, ...				
Vacuum supply	/			From -0.7 to -1 bar Compatible with vacuum pump or vacuum line	

Electrical Specifications

Maximum power (W)	5 W
Typical power (W)	1.7 W
Digital sensor supply voltage (V)	5 V
Analog sensor supply voltage (V)	5 to 24 V
Maximum sensor power (W)	2 W


Communication specifications

Interface	M12 8 pins
Communication type	Universal Asynchronous Receiver-Transmitter (UART)
Serial communication speed	230400 bauds


Control and monitoring

UART commands	Pressure regulation/ Flow regulation by feedback loop with flow sensor/ Volume injection with flow sensor/ Sensor configuration & monitoring
Software control	ESI via a OEM Control Center only
Data management	Custom pressure regulation waveform : <ul style="list-style-type: none"> - 4 available custom waveforms - 10 ms time step - 6000 available points per waveform

Dimensional drawing

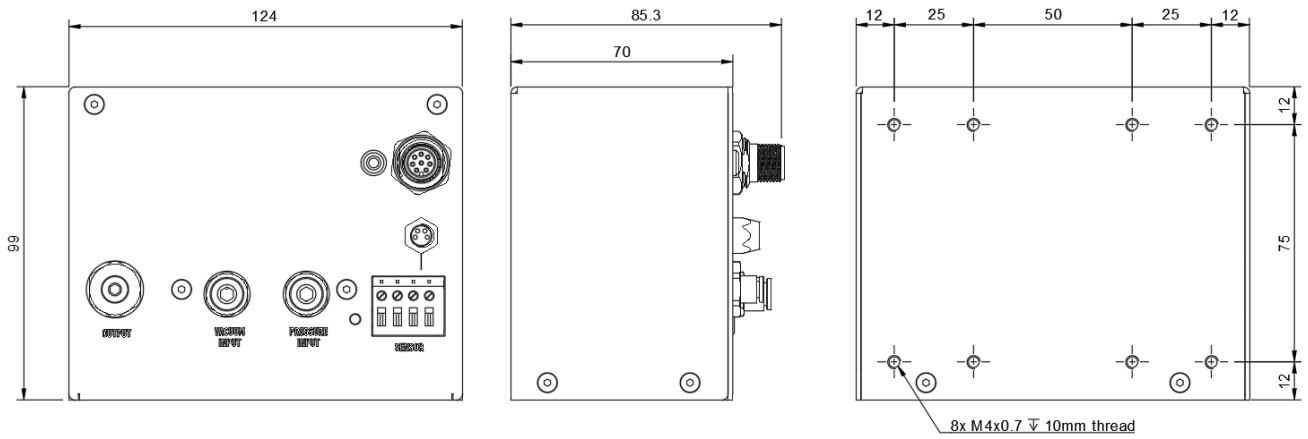


Connections

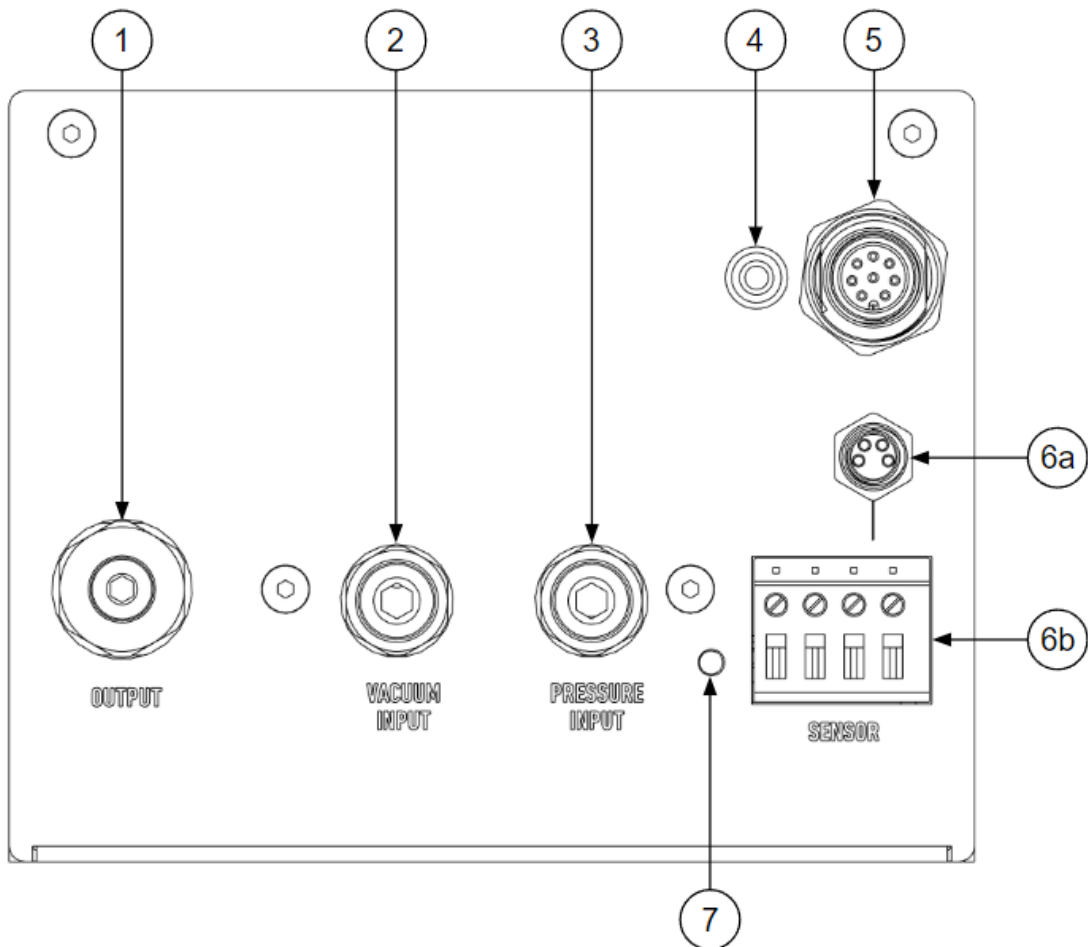

1	Pressure output	4mm push-in (or any G1/4 connector)
2	Vacuum input (modules type 4 and 5 only)	6mm push-in (or any G1/8 connector)
3	Pressure input (10 bar max)	6mm push-in (or any G1/8 connector)
4	Communication LED	Green LED - ON when communicating
5	Connection to OEM Control Center (or OEM Hub)	M12 male - 8 pins
6	Sensor connection	6a : M8 female 4 pins
		6b : Terminal block 4 pins
7	Sensor LED	Green LED - ON when sensor connected

Sensor wiring


1	Vcc 5-24V (power supply)
2	SCL (clock line for I2C)
3	Ground
4	Data line (Analog signal / SDA for I2C)



Assembly recommendations


The module can be used in any orientation.

Assembly on standard perforated sheet metal

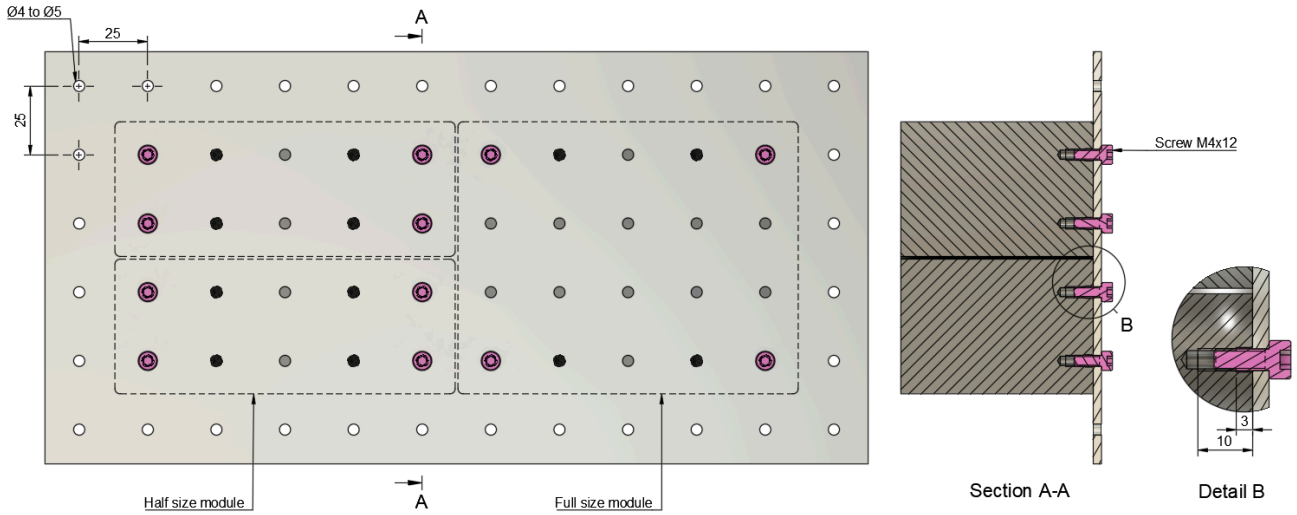

Assembly with brackets

Brackets are Elveflow custom parts that can be purchased with an OEM system to assemble the modules together.

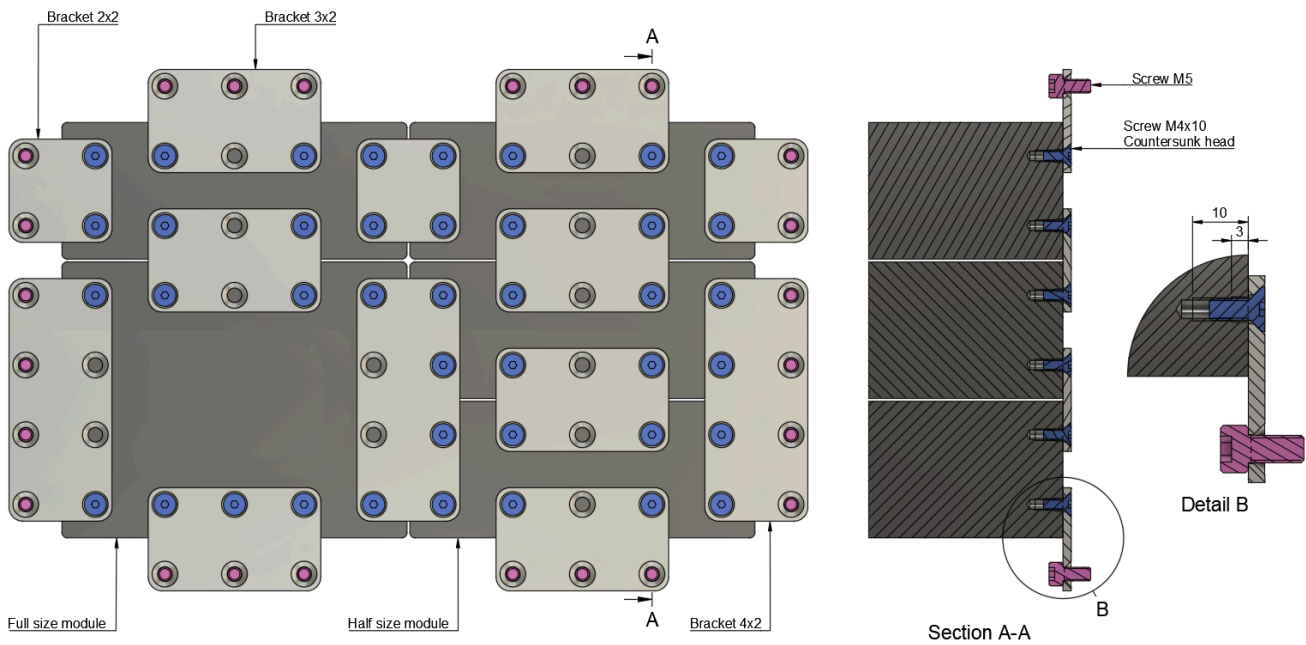

Brackets Dimensional Drawing

